


# THERMAC

(HIRE) LTD

## TWIN STANDARD



## TWIN STANDARD

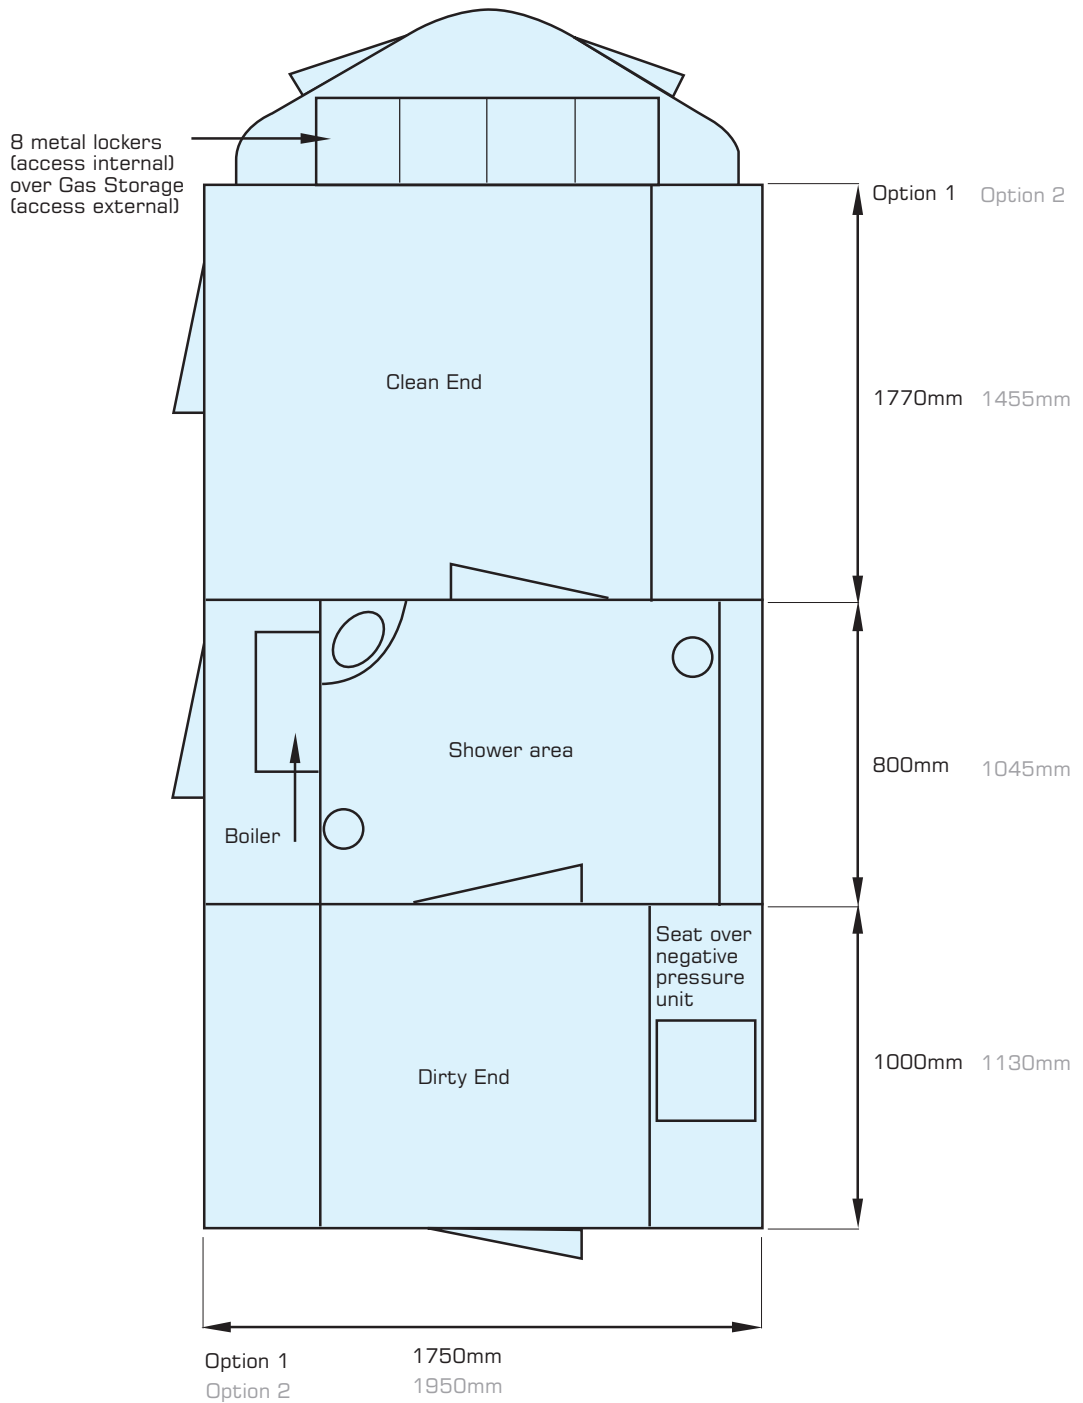

## TWIN STANDARD

### CHASSIS

- Single axle to carry up to 1500kg, brake damped tow hitch
- Spring loaded handbrake, 13" wheels and tyres
- A-frame welded to chassis
- Tow hitch bolted through A-frame
- Four corner steadies
- Corner steady key included

### BODY

- GRP 5 ply board, white high gloss, polished both sides
- All corners supported by aluminium angles
- All floor areas are covered with hardwearing fibreglass and non-slip surface.
- Aluminium around doors and frames
- All doors are self-closing and fitted with an airtight strip
- Grab handles fitted as standard to all corners
- Appropriate warning signs

| INTERNAL SIZES | Option 1       | Option 2      |
|----------------|----------------|---------------|
| • Clean End    | 1750 x 1770 mm | 1950 x 1455mm |
| • Shower Area  | 1750 x 800 mm  | 1950 x 1045mm |
| • Dirty End    | 1750 x 1000 mm | 1950 x 1130mm |

### CLEAN END

- Textured fibreglass covered floor, lower wall
- Lockable sealed external door with vent
- Eight personnel lockers
- Mains electric box, light, 1KW bathroom heater
- 8 x 13A charging sockets
- Mirror and hooks
- Sink
- Water drain point
- Pumped waste water filter system on/off switch
- Fresh Water supply pump on/off switch
- Self-closing door into shower area

### SHOWER AREA

- Fibreglass covered floor and lower walls
- Non-slip matting on floor
- Two showers
- Water drain points
- Mirrors and hooks
- Self-closing door from dirty end
- Light

### EXTERNAL

- Access to pump and waste filter system
- Access to gas bottle

### DIRTY END

- Fibreglass covered floor and lower walls
- Removable air extraction unit beneath removable bench
- Mirror and hooks
- Light
- Water drain point
- Self-closing door from exterior
- Pumped waste water filter system on/off switch

All gas appliances are fitted, tested and certified to conform to current Gas Safety Installation and Use Regulations 1994. The gas water heater must be regularly serviced, according to manufacturers instructions. The unit also comes with an electrical installation certificate issued by a registered NICEIC electrician. Installation and commissioning on site must be carried out by a competent person along with regular safety checks of the unit and any portable appliances according to HSE regulations and/or guidelines.

### STANDARD ITEMS FITTED TO THERMAC SELF CONTAINED DECONTAMINATION UNITS

- 1 Pumped waste water filter system
- 2 Hand wash basin in clean end
- 3 Bench seat over NPU
- 4 15m 240v armoured cable and plug-in RCD
- 5 15m fresh and waste braided hose
- 6 2 sets of double steps
- 7 Propane gas regulator, isolating valve and test point
- 8 Grab handles fitted to all corners
- 9 Plastic plumbing
- 10 Leg key
- 11 Road lights to current regulations
- 12 Test certificate for gas water heater and electrical system
- 13 Datatag® security marking system
- 14 Generator

### EXTRAS AVAILABLE ON THERMAC DECONTAMINATION UNITS

- 1 Hitch Lock (Enclosed Type)
- 2 Wheel Clamp
- 3 Replacement 5 micron water filter.
- 4 Optional 240v Power Points.
- 5 Spare Wheel and Tyre
- 6 Fire Extinguisher 1kg Dry Powder
- 7 First Aid Kit
- 8 High Level Side Marker Lights
- 9 Rear lamp guards
- 10 Soap dispenser